

RS75 PUMP-OUT PEDESTAL

ROLEC
Global *Marina* Services



The **RS75** PUMP-OUT Range

The RS75 includes built-in controls and has been designed to work in conjunction with a remote pump.

PRODUCT FEATURES

- Hot-dipped galvanised steel internal chassis
- UV stabilised external shell and shell material variants: stainless steel, composite or aluminium
- Can operate with a variety of pump sizes and types
- Sewage and sea water resistant materials
- 360 degree low energy LED lighting c/w with pump-out signs on lens
- 10m of 38mm ship-to-shore hose
- Valve operated euro-probe c/w optical viewing lens
- Built-in variable setting pump-out timer and electrical protection switchgear
- The range consists of free-to-use or pay-to-use options
- Pumping ability ranges from 100m to 1000m horizontal (Depending on the pump specified RS200/RS250/RS300)



10m
Hose



UV
Stabilised



CE
Certified



IP65
Weather Proof



LED
Illumination



Strong
& Durable

SPECIFICATIONS

CHARACTERISTICS

Materials	Head: ABS Granulate Natural Polyethylene Body Internal: Hot-Dipped Galvanised Steel Body External: Powder Coated Aluminium / 304 or 316 Stainless Steel BS EN-10204:2004, BS EN 573-3:2013, BS EN 755-2:2016
Dimensions	325mm x 1165mm x 325mm (W x H x D)
Operating Temperature	-30°C to +60°C (Installed and Operated Within Multiple Climates from Around the Globe)
IP Rating	Pedestal Rated IP65
Compliances	Wiring Regulations – BS 7671:2018+A2:2022 BS EN 61439-2:2011 BS EN 61439-5:2015 CE Certified Low Voltage Directive 2014/35/EU Electromagnetic Directive 2014/30/EU Corrosion Resistant / Salt Mist Tested Panels ISO 9227 UV Stabilised Flame Retardant to UL94
Typical Weight (AVG)	27kg (1000m Maxi Classic)

ELECTRICAL

Voltage	Single Phase 230V or Three Phase 400V AC (±10 %) 50/60Hz
Overload & Fault Current Protection	MCB/RCD or RCBO IEC 60898-1/IEC 61009-1/IEC 61009-1

PUMP

The spec of the pump required would depend on usage required, on the distance from the pump-out pedestals and how many pedestals are connected to the pump.


Pump Spec	Refer to the Data Sheets Below for Complete Pump Specs RS200 Pump: MSDS-0024 RS250 Pump: MSDS-0025 RS300 Pump: MSDS-0026
-----------	--

LIGHTING

Type	360 Degree Low Energy LED
Rating	2x G9 2.3W 5000k
Protection	6amp RCBO

OPTIONS

- Shell colours and materials
- Branding vinyls
- Payment facility
- Keyswitch control
- Rinse tap

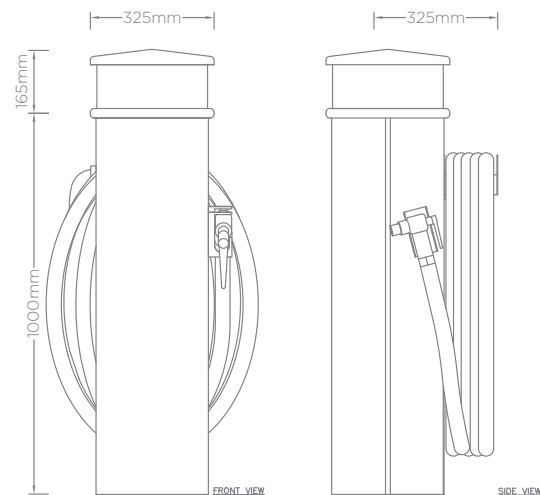

Images are for marketing purposes only and are not contractual © 2025



Head office contact:
 t: +44 (0) 1205 724754
 f: +44 (0) 1205 724876
 rolec@rolecserv.co.uk

Rolec Services Ltd
 Ralphs Lane, Frampton West
 Boston, Lincolnshire
 UK. PE20 1QU

MSDS-0022

@RolecMarina
www.rolecserv.com