



Designed &
Manufactured
in the UK

ROLEC

HEX SOS

Marina emergency service pedestal

HEX SOS EMERGENCY PEDESTAL

Marina emergency service pedestal

Built for demanding marine environments, the HEX SOS pedestal delivers a sophisticated design matched throughout the range of HEX marina service pedestals. Made from powder coated steel or marine-grade polished stainless steel, it withstands harsh coastal conditions while adapting to your requirements.

With over 35 years of Rolec engineering behind it, the HEX combines premium materials with a modular design that can accommodate a range of emergency equipment and LED lighting.

A versatile solution, the HEX SOS pedestal fits seamlessly alongside the wide range of HEX marina service pedestals. Ideal for marinas and waterfront developments seeking performance, reliability, and adaptability.



Product features

- 30" Lifebuoy with reflector bands & grab loops
- Lifebuoy 30m x 10mm encapsulated floating throw rope
- First aid kit
- LED amenity down lighting (Photocell controlled)
- Built-in 6A 30mA Type A RCBO
- Heavy-duty power coated steel or stainless steel enclosure
- Built-in cable terminals
- Internal access door
- Optional fire axe
- Optional fire extinguisher (6kg dry powder or 9kg water - UK only)
- Optional flashing sounder beacon
- Strong and durable IP66 / IK10 rated
- Surface or roof mountable
- Easy to install & maintain
- Red as standard (other options available upon request)
- The HEX range also includes electrical and water service pedestals
- Designed & manufactured in the UK



Ideal for any waterfront location

A suitable service pedestal solution for marinas, quaysides, docks, or and waterfront development.



Emergency service provisions

Pre-equipped with lifebuoy, 30m floating throw rope and first aid kit. Optional equipment available.



Easy to install & maintain

Modular design with easy access to internal components allowing for maintenance and future upgrades.



Seamless integration

These SOS pedestals fit impeccably alongside the range of HEX marina service pedestals.



Branding & colour options available

Offering a bespoke pedestal branding service; from logos & brand colours, to vinyl wraps.




Strong, durable & compliant

IP rated, UV stabilised, fire retardant to withstand harsh coastal conditions.


Specifications

Unit Dimensions

Hex SOS pedestal:

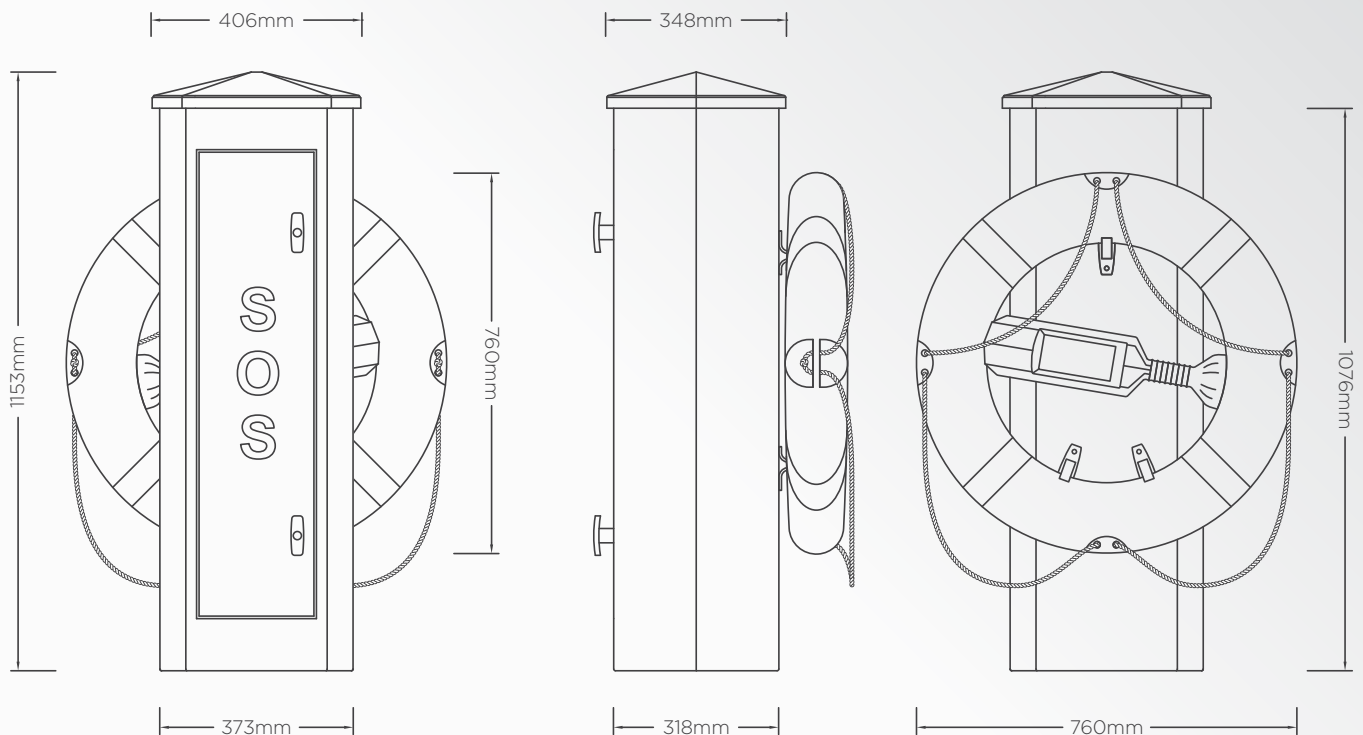

Ground mounting base:

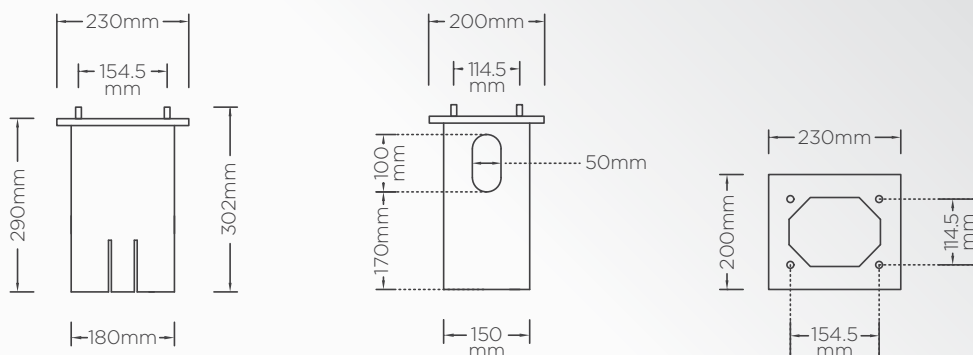

Specifications

Technical Data

Built-in Protection	RCBO BS EN IEC 61009-1
Cable Terminals	3x 16mm 1P + N + E
Input Voltage	230V AC (±10 %) 50/60Hz
Earthing	Earth terminal
Amenity Lighting	• 360° Low energy LED • Rating – 11.5W 506Lumen Linear LED Strip, 24V DC • Colour temperature – 6500K • Protection – 6A 30mA Type A RCBO • Standby power consumption – 9W
Dimensions	• Pedestal – 406mm x 1153mm x 348mm (W x H x D) • Lifebuoy – 760mm x 760mm x 92.5mm (W x H x D)
Weight	< 45kg (including emergency equipment, model dependent)
Environmental	• Ingress protection – IP66 • Impact protection – IK10 • Operating temperature – -30°C to +60°C • Operating humidity – 5% to 95%
Materials	Heavy duty 1.5mm Steel applied with 45-55 microns of Zinc primer and textured Polyester powder coating or 304 / 316 Stainless Steel
Unit Colour	 Red  Other colours available upon request
Certifications & Compliances	• Wiring Regulations – BS 7671:2018+A3:2024, • Safety Compliance (LVD) – 2014/35/EU, SI 2016/1101, • Controlgear – BS EN 61347-1:2015+A1:2021, BS EN 61347-2-13:2014+A1:2017, EN IEC 60947-1:2021, BS EN IEC 60947-3:2021+A1:2025, EN IEC 61439-2:2021, BS EN 61439-5:2015 • EMC Directive – 2014/30/EU, SI 2016/1091 • Enclosure – Impact Protection IK10 (BS EN 62262:2002+A1:2021), BS EN IEC 60670-1:2021+A11:2021, BS EN 60670-22:2006, UV Stabilised Materials • Environmental Protection – BS EN 60529:1992+A2:2013 • Cables – BS 6004:2012+A1:2020 • Metering (where applicable) – 2014/32/EU, SI 2016/1153, BS EN 50470-1:2006+A1:2018, MID B+D Certified • Safety Equipment – SOLAS 74 as amended, Regulation III/4, III/7, III/34 & X/3, LSA Code, 2000 HSC Code 8, Marine Equipment Directive (MED) 2014/90/EU • RoHS – 2011/65/EU, SI 2012:3032 • REACH – 1907/2006, UK REACH • Certifications – CE & UKCA
Warranty	12 Months (extended warranty available upon request)



Options & accessories

Product Code	Item Description
GMHP0010	Ground mounting base for Hex pedestal
MAFA0560	Pedestal to deck fixing kit (4x nuts, bolts, and washers only)
AKR1000	Standard pedestal to deck rubber splash mat
MAFA0730	Add a flashing sounder beacon
EEAA0030	6kg Dry powder fire extinguisher (UK only)
EEAA0040	9kg Water fire extinguisher (UK only)



GMHP0010



MAFA0730



EEAA0030



Branding & colour options available

ROLEC offer a bespoke branding service; from logos & brand colours, to vinyl wraps. This can be arranged at time of order. Contact ROLEC for details.

Brand names, logos and trademarks used herein remain the property of their respective owners. This listing of any firm or their logos is not intended to imply any endorsement or direct affiliation with Rolec Services Ltd. and is purely to demonstrate branding opportunities.



THIS DOCUMENT CONTAINS INFORMATION THAT IS SUBJECT TO CHANGE WITHOUT NOTICE.
The latest version of this publication can be downloaded at <https://www.rolecserv.com/downloads-marina-services>

Illustrations of the product and user interface are for marketing purposes only.

Brand names, logos and trademarks used herein remain the property of their respective owners.
This listing of any firm or their logos is not intended to imply any endorsement or direct affiliation with Rolec Services Ltd. and is purely to demonstrate branding opportunities.

© 2025 by Rolec Services Ltd. All rights reserved.
MSHSOSD-V01-R0 Hex SOS Pedestal Data Sheet



Designed &
Manufactured
in the UK

ROLEC

t: 01205 724754
e: enquiries@rolecserv.co.uk
www.rolecserv.com

